











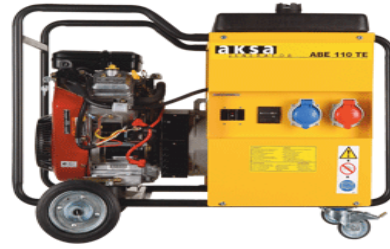


AB 110 TE



Frequency	Hz	50
Model	AB 110 TE	

SPECIFICATIONS

-  Fuel gauge
 Fuel gauge is on the fuel tank
-  OHV
 Over Head Valve easy to maintenance
-  Oil level alarm
 When the oil level is low that the engine will not start.
-  AVR
 AVR is a device often solid state, for controlling the output voltage of a generator.
-  Maintenance free battery
 It is long life
-  Wheel kit
 Easy Transportation
-  Circuit Protector
 Circuit Protector is a device capable of carrying and interrupting both load and fault current upto a certain rating.
-  Generator set out put sockets
-  Voltmeter
 It is a gauge for out put voltage of generator set.
-  Choke System
 When the cold weather, choke system aid to operate the engine
-  Dual Element air filter
-  Large capacity fuel tank
 15-25 L

AB 110 TE

GENERATING SET

AC Rated Power	kW	8,00
	kVA	10,00
Maximum Power	kW	8,80
AC Rated Current	AC Rated Current	14,40
Voltage	V	400
Frequency	Hz	50
Phase		3
Power Factor		0,80
Fuel Consumption	L/h.	5,00
Run Time	Hour	3,00
Noise Level	dB(A)	75,00

ENGINE

Speed	rpm	3000
Power	Hp	18,0
Cylinder No.		2,0
Cylinder Bulk	mL.	570
Fuel Type		Gasoline
Fuel Tank Capacity	L	16,0
Start Type		Electrical

DIMENSIONS

Width	mm.	740
Lenght	mm.	910
Height	mm.	750
Dry Weight	kg.	122,0