

# AC 55

Engine : Cummins  
 Alternator : Mecc Alte  
 Control System : P 602



## ISO8528

This generator set has been designed to meet ISO 8528 regulation.

## SZUTEST

This generator set is manufactured in facilities certified to ISO 9001.



This generator set is available with CE certification.

## 2000/14/EC

Enclosed product is tested EU noise legislation 2000/14/EC

### 3 Phase Ratings, 50 Hz, PF 0,8

Voltage	Standby Rating (ESP)		Prime Rating (PRP)		
	kVA	kW	kVA	kW	Amp
400/230	55,00	44,00	50,00	40,00	72,00

**Standby Rating (ESP):** Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

**Prime Rating (PRP):** Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

### STANDARD SPECIFICATIONS

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket cooling heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel belows supplied separately
- Static battery charger
- Manual for use and installation.

### OPTIONAL EQUIPMENTS

#### ENGINE

- Remote Radiator Cooling
- Fuel-Water Separator Filter
- Low water level alarm
- Oil heater

#### ALTERNATOR

- Anti-Condensation Heater
- Over sized alternator
- Main line circuit breaker

#### CONTROL SYSTEM

- Remote annunciator panel
- Earth fault, single set
- Charge Ammeter

#### OTHER ACCESSORIES

- Automatic or manual fuel filling system
- Manual oil drain pump
- Low and high fuel level alarm
- Residential silencer
- Enclosure: weather protective or sound attenuated
- Duct adapter (on radiator)
- Inlet and outlet motorised louvers
- Inlet and outlet acoustic baffles
- Trailer
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Double wall chassis
- Supplied with oil and coolant - 30 °C
- Battery isolating switch
- Main Fuel Tank

#### TRANSFER SWITCH

- Three Pole Contactor
- Four Pole Contactor

# AC 55

Engine : Cummins  
 Alternator : Mecc Alte  
 Control System : P 602

## ● DIESEL ENGINE SPECIFICATIONS

Manufacturer		Cummins		
Model		S3,8-G6		
No. of Cylinders and Build		4 Cylinder, In Line		
Aspiration and Cooling		Turbo Charged		
Maximum Standby Power		1500 rpm		
		54 kW[72HP]		
Total Displacement	L	3,80		
Bore and Stroke	mm	97 x 128		
Compression Ratio		17,5:1		
Rated Speed (rpm)	rpm	1500		
Governor		Mechanical		
Oil Capacity	L	11,00		
Coolant Capacity	L	15,00		
Intake Air Flow	m <sup>3</sup> /min.	3,60		
Radiator Cooling Air	m <sup>3</sup> /min.	82		
Exhaust Gas Flow	m <sup>3</sup> /min.	5,30		
Exhaust Gas Temperatures	° C	546		
Start System		12 V d.c.		
Fuel Consumption	Load	%100	%75	%50
	L/h	12,80	9,50	6,50

## ● ALTERNATOR SPECIFICATIONS

Make		Mecc Alte
Model		ECO 32-1L/4
Frequency	Hz	50
Power	kVA	50
Design		Brushless, 4 poles
Cos Phi		0,80
Phase		3
Voltage	V	400/230
Current	A	72
Insulation Class		H
Temperatur		H
Stator		2 / 3 steps
Rotor		Single Bearing System, Flexible Disc
Excitation System		Electronic ( AVR )

## ● DIEMENSIONS AND WEIGHT

Open Type	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
AC 55	870	1780	950	1250	105
Sound Attenuated Type	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
AK 30	1130	2500	1010	1470	105

# AC 55

Engine : Cummins  
 Alternator : Mecc Alte  
 Control System : P 602

## P 602 - Control System



- 1 A U]b'gHh g'X]gd'Um'
- 2 8]gd'UmgVc''Vi Hrcb''
- 3 DU[ Yf]bZcfa U]jcbE'Vi Hrcb''
- 4 7 ca a cb U'Ufa ]bX]W]rcf''
- 5 GHh g'@98fj''
- 6 C dYfU]jcb'gY'YV]b[ 'Vi Hrcbg''

## Devices

8G9ža cXY''\$&\$'5i hc'A U]bg:] U]i fy Věbfc''a cXi 'Y''  
 6UHVfmVUf[ Yf]jodi h%, !&\* ( 'j c'hžci rdi h''&+ž' J ) '5'f&( 'J E'cf%' ž 'J c'h) 5'f&&J E  
 9a Yf[ YbVhrcd' di g\ 'Vi Hrcb'UbX ž gYg Zc'fVěbfc''V]fV ]rg''

## Construction and Finish

7 ca dcbYbrj ]bgU''YX' ]b'g\YYgh''Y'YbWcgi fy''D\cgd\UHY'WYa ]W'ždfY!VěU]b[ 'cZghY''dfcj ]XYg Věffcg]cb  
 fYg]ghUbhgi fZUW''Dc'mYgYfVěa dcm]Y' dck XYf'rcdVěU]hZcfa g\]] [ 'cgg'UbX'Yi HfYa Y'mXi fUV'Y ž]b]g\''@cV]UV'Y  
 UbX\]b[ YX'dUbY'Xccf' d'fcj ]XYg YUgmUWV'gg'hc''Věa dcbYbrj''

## Installation

7 cblfc' d'UbY'' ]g'a ci bHYX'cb VUgYZUa Y'k ]h' gHY''g'UbX''@cW]HYX'UhiH'Y'f[ \hig]XY'cZH'Y [ YbYfUrcf'gYhfK \Yb'mci  
 'cc\_'UhiH'Y; Yb''GYH'Zca '5'HYfbUrcfE

## Generating Set Control Unit

H'Y''8G9''\$&\$' ]g'U'g'UbXUfX Věbfc''a cXi 'Y'Zc'ci f [ YbYfUrcf'gYhg'i d'hc'&\$\$\_J 5'UbX'ih\Uj Y'VYYb'XYg][ bYX'hc  
 ghUfhUbX'ghcd'X]YgY' UbX' [ Ug[ YbYfUrcf'gYhg''H'Y'8G9''\$&\$' a cXi 'Y\Ug'VYYb'XYg][ bYX'hc'a cb]rcf [ YbYfUrcf  
 ZYei YbVhžj c'iz'W'fYbHžYb[ ]bY'c' ]dfYggi fyžVěc'UbhiYa dYfUhi fy'fi bb]b[ \ci fg'UbX' VUHY'fmj c'lg''A cXi 'Y  
 a cb]rcf'g' h'Y'a U]bg'gi dd'mUbX'gk ]H'W'c] Yf'hc' h'Y' [ YbYfUrcf'k \Yb'h'Y'a U]bg'dck Yf'ZU]g''H'Y'8G9''\$&\$'U'gc  
 ]bX]W]HY'g'cdYfU]jcbU'ghUhi g'UbX'Zji 'hVěbX]j]cbgž'5i hca U]W]m'g\i H]b[ 'Xck b'h'Y; Yb''GYhUbX' [ ] ]b[ 'Hfi Y'žfghi d  
 žji 'hVěbX]j]cb'cZ; Yb''GYhZU]i fy''H'Y'@78'X]gd'Um]bX]W]HY'g'h'Y'Zji 'H'

### Standard Specifications

A ]VědfcW'ggcf'Věbfc''YX''  
 @78'X]gd'Uma U\_Yg ]bZcfa U]jcb 'YUgmhc'fYUX''  
 (!' ]bYž\*( '1' % &d] ]Y'X]gd'Um'

5i hca U]W]m'f'UbgZ'fg'VYk YYb'a U]bg'fi H]m'hc'UbX' [ YbYfUrcf'dck Yf''  
 A Ubi U'dfc[ fUa a ]b[ 'cb'ZcbhdUbY''  
 I gYf]Z]YbX'mgYHi d'UbX'Vi Hrcb''Unci H'  
 : fcbhdUbY'dfc[ fUa a ]b[ ''  
 FYa cHY'ghUff'

9j Ybh'c[ [ ]b[ 'f]sg\ck ]b[ 'XUHY'UbX'h'a Y''  
 7 cblfc'g' Ghcd#F'YgYhZ' A Ubi U'ž5i hcžHYghZ'GHUfz'Vi Hrcbg''5b'UXX]j]cbU'di g\ 'Vi Hrcb'bYi hrc' h'Y'@78'X]gd'Um]g  
 i gYX'hc'gVc''h'fci [ \ h'Y'a cXi 'Yg'f'a YHY'f]b[ 'X]gd'Um]g''

# AC 55

Engine : Cummins  
 Alternator : Mecc Alte  
 Control System : P 602

## Instruments

9B: #9  
 9b[ ]bY'gdYYX"  
 C]'dfYggi fY"  
 7cc'UbhY'a dYfUhi fY"  
 F i b' hja Y"  
 6UHYfmj c'rg"  
 7cbZ[ i fUVY' hja ]b[ "  
 ; 9B9F5HCF  
 J c' hU[ Y f@ @B' "  
 7i ffYbhf@ @& @' "  
 : fYei YbVW"  
 A5-BG  
 J c' hU[ Y f@ @B' "  
 : fYei YbVW"  
 A U]bg'fYUXn'  
 A U]bg'YbUV'YX"  
 ; Yb"GYhfYUXn'  
 ; Yb"GYhYbUV'YX"

## Protection Circuits

K5FB-B:  
 7\Uf[YZ]i fY"  
 6UHYfm@ck#[ ]\j c'hU[Y"  
 : U] h' ghcd"  
 @ck#[ ]\ [ YbYfUhc'fj c'hU[Y"  
 I bXYf#j Yf[ YbYfUhc'fZ'Yei YbVW"  
 Cj Yf# bXYf'gdYYX"  
 @ck c]'dfYggi fY"  
 <] \ V'c'UbhY'a dYfUhi fY"  
 G<I H8CK BG  
 : U] h' ghUf"  
 9a Yf[ YbVW'ghcd"  
 @ck c]'dfYggi fY"  
 <] \ V'c'UbhY'a dYfUhi fY"  
 Cj Yf# bXYf'gdYYX"  
 I bXYf#j Yf[ YbYfUhc'fZ'Yei YbVW"  
 I bXYf#j Yf[ YbYfUhc'fj c'hU[Y"  
 C]'dfYggi fY'gYbgcf'cdYb"  
 7cc'UbhY'a dYfUhi fY'gYbgcf'cdYb"  
 9@97HF=75@HF-D  
 ; YbYfUhc'fj YfW'ffYbh'

## Options

: 'YI J'Y'gYbgcf'Wb VY V'c'UbhY'a dYfUhi fY'  
 dfYggi fY'Z'dYfVW'bH[U'Y'fk'Ufb]b[ #]i' hXck b# 'YVW'VW' h'f'dL'  
 @c'W'gYh]b[ 'dUfUa YH'fg'UbX'a cb]h'f]b[ 'Zca 'D7' h'  
 V'c'UbhY'a cXi 'Y'k ]h' I G6 V'c'UbhY'a dYfUhi fY'gYbgcf'cdYb"

## Standards

9'YVW'VW' GUZYhm#9A 7 V'c'UbhY'a dYfUhi fY'  
 9'YVW'VW' Vi g]bYgg'Yei ]da Ybh'  
 6G'9B '\*%\$#!\*!&9A 7 ]a a i b]mighUbxUfX"  
 6G'9B '\*%\$#!\*!( '9A 7 Ya ]gg]cb'ghUbxUfX"


## Static Battery Charger

'6UHYfmVUf[ Yf ]g'a Ubi ZVW' fYX'k ]h' gk ]h'W]b[ !a cXY'UbX'GA 8 H'VW'bc'c[ mUbX'ih\Ug\ ] [ \ YZ]VbYVW' 6UHYfmVUf[ Yf  
 a cXY'gfci hdi hJ !=VUfUW'f]gh]W]g'j YfmV'cgY' h'c'gei UfY'UbX'ci hdi h]g' ]'Ua dYfz% z' ]' Z'f'&] c'hUbX' &+Z' ]' Z'f'&' ( ]' "  
 #bdi h% , ' !&\* ( j c'h57 "' Dfc]bY' &(\$) \Ug'Z' "mici hdi hg\chV'VW]hdfchV'W]cb'UbX'ihVWb'VY' i gYX'Ug'U'VW'ffYbhgci fVW"  
 Dfc]bY' %&\$) #&(\$) VUf[ Yf\Ug\ ] [ \ YZ]VbYVW'cb[ " ]Z'Z' "ck ZU]i fY'fUfY'Z' ] [ \ hk Y] [ \ hUbX' "ck \ YUhfUX]UfYX' ]b  
 UVW'cfXUbW'k ]h' " ]bYUf'U'fYfbU]h' Yg' H\Y' VUf[ Yf ]g' Z'hYX'k ]h' U'dfchV'W]cb'X]cXY'UV'cgg'h'Y'ci hdi h'7 cbbYVW'VUf[ Y'Z]  
 fY'UmV'c] VY'hk Y'Yb'dcg]h'j Y'ci hdi hUbX'7: 'ci hdi h' H\Y'mUfY'Yei ]ddYX'k ]h' F: =Z]h'f' h'c' fYXi V'Y'YVW'VW'bc]gY'fUX]UfYX'  
 Zca 'h'Y'XY'jVW"; U] Ub]W' m]gc'UfYX' ]bdi hUbX'ci hdi h]m]d]VW' m( \_J Z'f'\ ] [ \ fY' ]UV' ]h'f'

# AC 55

Engine : Cummins  
 Alternator : Mecc Alte  
 Control System : P 602

## AK 30 - Canopy

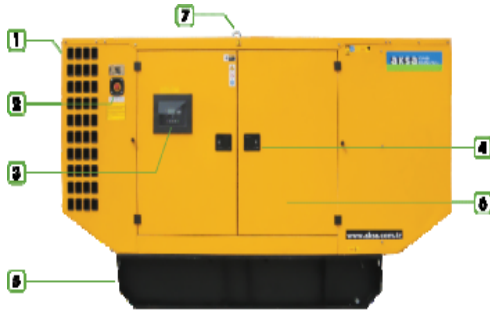

- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Sump drains valves
- 6 Sound proof foam material
- 7 Lifting Points

## Introduction

Sound-attenuated and Weather-protective Enclosures Sound-attenuated and weather protective enclosures for generating sets from Aksa, meet even the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies (10- 300kVA) provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

## Standard Specifications

- Compact footprint, low profile design.
- Enclosure, generator set, exhaust system and fuel tank are pre-assembled, pre-integrated and shipped as one package
- Body made from steel components treated with polyester powder coating
- Fire retardant foam insulation
- Easy access to all service points
- Exhaust system inside canopy
- Large doors on each side
- Control panel viewing window in a lockable access door
- Emergency stop push button mounted on enclosure exterior
- Cooling fan and battery charging alternator fully guarded
- Fuel fill and battery can only be reached via lockable access doors.
- Lifting points on the top of canopy and base frame
- Customer options available to meet your applications needs.
- Aksa makes its generating sets' noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been approved by the notified body Szutest

Width	mm.	1010
Length	mm.	2500
Height	mm.	1470