

# APD 125 A

Engine : Aksa  
 Alternator : Aksa  
 Control System : P 602



## ISO8528

This generator set has been designed to meet ISO 8528 regulation.

## SZUTEST

This generator set is manufactured in facilities certified to ISO 9001.



This generator set is available with CE certification.

## 2000/14/EC

Enclosed product is tested EU noise legislation 2000/14/EC

### 3 Phase Ratings, 50 Hz, PF 0,8

Voltage	Standby Rating (ESP)		Prime Rating (PRP)		
	kVA	kW	kVA	kW	Amp
400/230	125,00	100,00	115,00	92,00	165,00

**Standby Rating (ESP):** Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

**Prime Rating (PRP):** Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

### STANDARD SPECIFICATIONS

- Heavy duty, water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket cooling heater
- Steel base frame and anti-vibration isolators
- Spare Fuel Tank
- Flexible fuel connection hoses
- Two bearing, class H alternator
- Industrial exhaust silencer and steel belows supplied separately
- Static battery charger
- Manual for use and installation

### OPTIONAL EQUIPMENTS

#### ENGINE

- Oil heater

#### ALTERNATOR

- Anti-Condensation Heater
- Main line circuit breaker

#### CONTROL SYSTEM

- Earth fault, single set
- Charge Ammeter

#### OTHER ACCESSORIES

- Automatic or manual fuel filling system
- Manual oil drain pump
- Low and high fuel level alarm
- Enclosure: weater protective or sound attenuated
- Trailer
- Tool kit for maintenance
- Main Fuel Tank

#### TRANSFER SWITCH

- 
- Four Pole Contactor
-

# APD 125 A

Engine : Akxa  
Alternator : Akxa  
Control System : P 602



## ➤ DIESEL ENGINE SPECIFICATIONS

Manufacturer		Akxa
Model		A6CRX65TI
No. of Cylinders and Build		6 Cylinder, In Line
Aspiration and Cooling		Turbo Charged and After Cooled
Maximum Standby Power		1500 rpm
		120 kW[160HP]
Total Displacement	L	6,49
Bore and Stroke	mm	105 x 125
Compression Ratio		17:1
Rated Speed (rpm)	rpm	1500
Governor		Electronic
Oil Capacity	L	16,00
Coolant Capacity	L	30,00
Intake Air Flow	m <sup>3</sup> /min.	8,00
Radiator Cooling Air	m <sup>3</sup> /min.	138
Exhaust Gas Flow	m <sup>3</sup> /min.	22,00
Start System		24 V d.c.
Fuel Consumption	Load	%100
	L/h	28,00

## ➤ ALTERNATOR SPECIFICATIONS

Make		Akxa
Frequency	Hz	50
Design		Brushless, 4 poles
Cos Phi		0,80
Phase		3
Voltage	V	400/230
Insulation Class		H
Rotor		Single Bearing System, Flexible Disc

## ➤ DIEMENSIONS AND WEIGHT


Open Type	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
APD 125 A	1510	2300	1100	1680	350
Sound Attenuated Type	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
APD 125 A	1940	3270	1170	1870	350

# APD 125 A

Engine : Akxa  
Alternator : Akxa  
Control System : P 602



## 1 P 602 - Control System

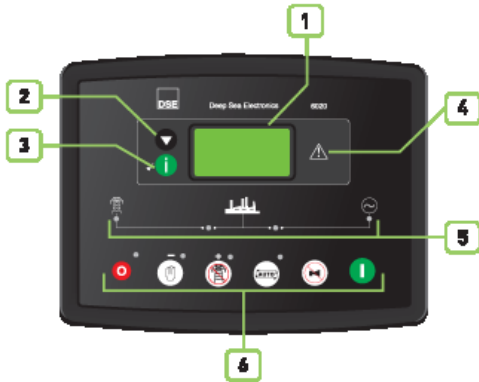

- 1 A U]b'gHh g'X]gd'Um'
- 2 8]gd'Um]Vc''Vi Hrcb''
- 3 DU[ Yf]bZcfa U]cbE'Vi Hrcb''
- 4 7 ca a cb U'Ufa ]bX]W]rcf''
- 5 GHh g'@98fj''
- 6 C dYfU]cb'gY'YV]b[ 'Vi Hrcbg''

## 2 Devices

8G9ža cXY''\$\$'5i hc'A U]bg:] U]i fy Vcbfc''a cXi 'Y'  
6UHYfmVUf[ Yf]bdi h%, !&\*( 'j c'hžci rdi h''&+ž' 'j ) '5'f&( 'j E'cf%' ž 'j c'h) 5'f&J E  
9a Yf[ YbVhrcd'di g\ 'Vi Hrcb'UbX Ž gYg Z'fVcbfc''V]fV ]rg''

## 3 Construction and Finish

7 ca dcbYbrj ]bgU'YX' ]b'g\YYgh'Y'YbWc]i fy''D\c]gd\UHY'WYa ]W'ždfY!VcbU]b[ 'cZghY' d'fcj ]XYg Vcbfc]cb  
fyg]g]Ubhgi fZUW''Dc'mYgYfVcb' d'cg]Y' d'ck XYf'rcdVcbU]hZcfa g\ ] [ 'cgg'UbX'Yi HfYa Y'mXi fUY'Y Ž]b]g\''@cV]UV'  
UbX\]b[ YX'dUbY'Xccf'dfcj ]XYg YUgmUWV]gg'hc''Vcb' dcbYbrj''

## 4 Installation

7 cblfc'dUbY' ]g'a ci bHY'cb VUgYZUa Y'k ]h' gHY'g'U]bX''@cW]HY'U]h'Y'f] [ \hig]XY'cZ]h'Y [ YbYfU]rcf'gYh'fK \Yb'nci  
'cc\_'U]h'Y'; Yb''GYH'Zca '5'HYfbU]rcfE

## 5 Generating Set Control Unit

H'Y'8G9''\$\$' ]g'U'g'U]bXU]f'Vcbfc''a cXi 'Y'Z'f'ci f [ YbYfU]rcf'gYh'g'i d'hc'&\$\$\_J 5'UbX'ih\Uj Y'VYYb'XYg] [ bYX'hc  
g]U]f]h'UbX'g]rcd'X]YgY'UbX' [ Ug[ YbYfU]rcf'gYh'g''H'Y'8G9''\$\$' a cXi 'Y'Ug'VYYb'XYg] [ bYX'hc'a cb]rcf [ YbYfU]rcf  
Z]Yei YbVcbžj c'ž'W'fYbž'Yb[ ]bY'c' d'fYggi fyž'Vcb'Ubh'Y'a d'YfU]h'fy'fi bb]b[ \ci fg'UbX'VU]HY'f]m]j c'lg''A cXi 'Y  
a cb]rcf'g' ]h'Y'a U]bg'gi dd'm'UbX'gk ]h'W'c] Yf'hc' ]h'Y' [ YbYfU]rcf'k \Yb' ]h'Y'a U]bg'd'ck Yf'ZU]g''H'Y'8G9''\$\$' U'gc  
]bX]W]HY'g'cdYfU]cbU'g]U]h'g'UbX'Z]i 'h'VcbX]h]cbgž'5i hca U]h'W'm]g\i h]b[ 'X'ck b' ]h'Y'; Yb''GYh'UbX' [ ] ]b[ 'h'fi Y'Z]fghi d  
Z]i 'h'VcbX]h]cb'cZ; Yb''GYh'Z]i' fy''H'Y'@7 8'X]gd'Um]bX]W]HY'g' ]h'Y'Z]i 'h'

### Standard Specifications

A ]W'cd'fc'W'ggcf'Vcbfc''YX''  
@7 8'X]gd'Uma U\_Yg ]bZcfa U]cb'YUgm]rc'fYUX''  
(!' ]bYž'\*( '1'%'&d] ]Y'X]gd'Um'

5i hca U]h'W'm]f'U]bgZ]f'g'VYh'k'Y'Yb'a U]bg'fi h]h'nc'UbX' [ YbYfU]rcf'd'ck Yf''  
A Ubi U'd'fc[ fUa a ]b[ 'cb'Z'cbhd'UbY''  
I gYf]Z]YbX'm]gYh'i d'UbX'Vi Hrcb''U]nci H'  
: fcbhd'UbY'd'fc[ fUa a ]b[ ''  
F Ya c]h'g]U]f'f'  
9j Ybh'c[ [ ]b[ 'f]g]g'ck ]b[ 'XU]Y'UbX'h]a Y''  
7 cblfc'g' G]rcd'f'YgY]h'Z'U]bi U'ž'5i hcž'HYgh'GH]f]z'Vi Hrcbg''5'b'U]X]h]cbU'di g\ 'Vi Hrcb'bYi hrc' ]h'Y'@7 8'X]gd'Um]g  
i gYX'hc'g]Vc''h'fci [ \ ]h'Y'a cXi 'Y'g]f'a Y]h'f]b[ 'X]gd'Um]g''

# APD 125 A

Engine : Aksa  
 Alternator : Aksa  
 Control System : P 602



## Instruments

9B: #9  
 9b[ ]bY'gdYYX"  
 C]'dfYggi fY"  
 7cc'UbhY'a dYfUhi fY"  
 F i b' hja Y"  
 6UHYfmj c'rg"  
 7cbZ[ i fUV'Y hja ]b[ "  
 ; 9B9F 5HCF  
 J c' hU[ Y f@ @B' "  
 7i ffYbhf@&!@ E"  
 : fYei YbVW"  
 A 5-BG  
 J c' hU[ Y f@ @B' "  
 : fYei YbVW"  
 A U]bg'fYUXn"  
 A U]bg'YbUV'YX"  
 ; Yb"GYhfYUXn"  
 ; Yb"GYhYbUV'YX"

## Protection Circuits

K 5F B-B;  
 7\Uf[ Y Z]i fY"  
 6UHYfm@ck # [ \ ] c' hU[ Y"  
 : U] h' ghcd"  
 @ck # [ \ [ YbYfUhc'f j c' hU[ Y"  
 I bXYf#j Yf [ YbYfUhc'f ZYei YbVW"  
 Cj Yf# bXYf'gdYYX"  
 @ck c]'dfYggi fY"  
 <] \ V'c'UbhY'a dYfUhi fY"  
 G<I H8CK BG  
 : U] h' ghUf"  
 9a Yf [ YbVW'ghcd"  
 @ck c]'dfYggi fY"  
 <] \ V'c'UbhY'a dYfUhi fY"  
 Cj Yf# bXYf'gdYYX"  
 I bXYf#j Yf [ YbYfUhc'f ZYei YbVW"  
 I bXYf#j Yf [ YbYfUhc'f c' hU[ Y"  
 C]'dfYggi fY'gYbgcf'cdYb"  
 7cc'UbhY'a dYfUhi fY'gYbgcf'cdYb"  
 9@97 HF =75@HF #  
 ; YbYfUhc'f c' j YfW ffYbh"

## Options

: 'YI J'Y'gYbgcf'WVb VY V'c'UbhY'a dYfUhi fY'Z  
 dfYggi fY'Z dYfVW'bH[ Y f'k Ufb]b[ #]i f'Xck b# 'YVW'VW' f'f'dL  
 @c'W'gYh]b[ 'dUfUa YH'fg'UbX'a cb]h'f]b[ 'Zca 'D7 h'  
 V'c'UbhY'a cXi 'Y'k ]h' I G6 V'c'UbhY'a cb'fa Ul '\* 'a H'

## Standards

9'YVW'VW' 'GUZYhm#9A 7 'V'c'UbhY'a dUfV] ]hm6G'9B '\* \$- ) \$  
 9'YVW'VW' 'Vi g]bYgg' 'Yei ]da Ybh'  
 6G'9B '\*%\$ \$! \*! & 9A 7 'ja a i b]mighUbxUfX"  
 6G'9B '\*%\$ \$! \*! ( '9A 7 'Ya ]gg]cb'ghUbxUfX"

## Static Battery Charger

'6UHYfmVUf[ Yf ]g'a Ubi ZVW' fYX'k ]h' 'gk ]h'W]b[ !a cXY'UbX'GA 8 'YVW'bc'c[ mUbx'ih\Ug\ ] [ \ YZ]VbYVW' 6UHYfmVUf[ Yf  
 a cXY'gf'ci hdi hJ !=VUfUW'f]gh]W]g'j YfmV'cgY' h'c'gei UfY'UbX'ci hdi h]g' ] 'Ua dYfz% z 'J 'Zcf'%&j'c'hUbX'&+Z' 'J 'Zcf'&'( 'J '  
 #bdi h% , ' ! &\* ( j c'h57 "' Dfc]bY'&(\$) \Ug'Z 'mci hdi hg\chV'VW]hdfchV'W]cb'UbX'ihVWb'VY' i gYX'Ug'U'VW'ffYbhgci fVW"  
 Dfc]bY'&(\$) #&(\$) 'VXUf[ Yf'\Ug'\ ] [ \ YZ]VbYVW'cb[ ' ]Z'Z' 'ck ZU]i fY'fUfY'Z' ] [ \ hk Y] [ \ hUbX' 'ck \ 'YUhfUX]UfYX' ]b  
 UVV'cfXUbW'k ]h' ' ]bYUf'U'fYfbU]j Yg' H\Y'VXUf[ Yf ]g'Z'hYX'k ]h' 'U'dfchV'W]cb'X]cXY'UV'cgg'h'Y'ci hdi h'7 cbbYVW'VUf[ Y'Z]  
 fY'UmV'c] 'VYh'YYb'dcg]h]j Y'ci hdi hUbX'7: 'ci hdi h' H\Y'mUfY'Yei ]ddYX'k ]h' 'F: =Z]h'f' h'c' fYXi V'Y'YVW'VW' 'bc]gY'fUX]UfYX  
 Zca 'h'Y'XY'jVW'; Uj Ub]W' m]gc'UfYX' ]bdi hUbX'ci hdi h]m]d]VW' m( \_J 'Zcf'\ ] [ \ 'fY' ]UV] ]h'f'

# APD 125 A

Engine : Aksa  
 Alternator : Aksa  
 Control System : P 602



## APD 125 A - Canopy

### Introduction

Sound-attenuated and weather protective enclosures for generating sets from Aksa, meet even the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies (8 - 275kVA) fit directly to the open generator set to provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

### Standard Specifications

Compact footprint, low profile design.

Enclosure, generator set, exhaust system and base-tank are pre-assembled, pre-integrated and shipped as one package

Body made from steel components treated with polyester powder coating

Fire retardant foam insulation

Easy access to all service points

Exhaust system inside canopy

Large doors on each side

Control panel viewing window in a lockable access door

Emergency stop push button mounted on enclosure exterior

Cooling fan and battery charging alternator fully guarded

Fuel fill and battery can only be reached via lockable access doors.

Lifting points on the top of canopy and base frame

Customer options available to meet your applications needs.

Width	mm.	1170
Length	mm.	3270
Height	mm.	1870