

UPS 3-PHASE

# INGENIO COMPACT

from 10 kW ———— to 20 kW



## Applications



Small  
data centre



Medium  
data centre



Network  
& Server



Telecommunication

### Innovative design

User-friendly design with built-in LCD touch screen for fast installation and monitoring.

### Wide battery range

Internal and external batteries for low TCO compact solutions.

### Power factor 1

Full rated output power guaranteeing maximum real power and optimal UPS sizing.

One of the most compact and easy to use solutions on the market, designed for critical power applications such as networks and servers, small and medium data centres, telecommunication.

The UPS is available in the 10-20 kW range with online double conversion technology and parallel redundant configuration.


**Ingenio Compact:** transformer free, high efficiency, compact and easy to install and use.



### Features and benefits

- On-line double conversion mode for total load protection.
- ECO mode for low running costs and environmental impact.
- Full rated output power (pf=1), ensuring optimal UPS sizing and utilization.
- Transformer free design for light small size layout.
- Full IGBT technology and electronic PFC, ensuring 0.99 input PF and low THDi for maximum upstream sources compatibility.
- Wide input voltage range to save battery life.
- Wide range of configurations with internal and external batteries for low TCO compact solutions.
- Innovative design allows for fast installation.
- Removable tray design for easy battery maintenance.
- Comprehensive set of communication options for total remote monitoring of equipment operation.
- Fully compliant with all international product standards for maximum quality guarantee.

### Back up time with internal batteries

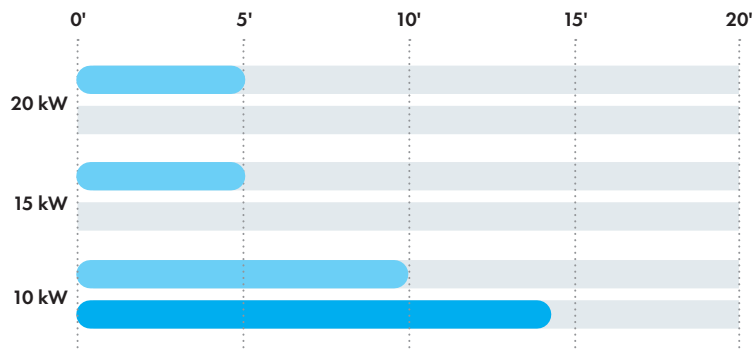

### Main options

- Isolation transformer.
- Transformers/autotransformers for voltage adjustment.
- Battery voltage temperature compensation.
- External maintenance bypass wall-mounted box.
- External battery cabinets for long autonomy times.
- Parallel redundant up to 6 units for system redundancy.
- Common battery.

## INGENIO COMPACT technical data

Rating (kVA)	10	15	20
Nominal Power (kW)	10	15	20
UPS dimensions WxDxH (mm)	440x800x800		
UPS weight (kg)	75	76	76
UPS weight with internal battery (kg)	150	165	165
External battery module dimensions WxDxH (mm)	550x650x1200		
Battery configuration	Internal (standard): 180 cells; external: 156/240 cells	Internal (standard): 216 cells; external: 192/240 cells	
<b>Input</b>			
Connection type	Hardwired 4w		
Nominal voltage	400 Vac 3-phase with neutral		
Voltage tolerance	-20%, +15% (rectifier); ±10% (bypass)		
Frequency and range	50/60 Hz, 40 to 70 Hz		
Power factor	0.99		
Current distortion (THDi)	<3%		
<b>Output</b>			
Connection type	Hardwired 4w		
Nominal voltage	380/400/415 Vac 3-phase with neutral		
Frequency	50/60 Hz		
Power factor	Up to 1, without power derating		
Overload capacity	110% for 60 min, 125% for 10 min, 150% for 1 min		
Efficiency (AC/AC)*	Up to 98%		
<b>Connectivity and function extensions</b>			
Front panel	Touch screen display		
Remote communication	<b>Included:</b> serial RS232; backfeed protection monitoring contact, remote EPO contact. <b>Optional:</b> 2 slots for SNMP adapter, ModBus-RTU, contact relay card		
Optional function extensions	Isolation transformer; transformers/autotransformers for voltage adjustment; external maintenance bypass; custom battery cabinets; wall-mounted battery fuse switch box; battery thermal probe; parallel kit; other options on request		
<b>System</b>			
Protection degree	IP 20		
Colour	RAL 9005		
Installation layout	30 cm wall-gap		
Accessibility	Positioning casters; bottom cable entry		

\*according to IEC/EN 62040-3

## Other features

<b>Environmental</b>	
UPS operating temperature range	0°C to +40°C
UPS storage temperature range	-10°C to +70°C
Altitude (AMSL)	< 1000 m without power reduction, > 1000 m with reduction of 0.5% per 100 m
Audible noise at 1 m (dBA)	< 52
<b>Standards and certifications</b>	
Quality assurance, environment, health and safety	ISO 9001:2015, ISO 14001:2015, BS OHSAS 18001:2007
Safety	IEC/EN 62040-1
EMC	IEC/EN 62040-2
Environment aspects	IEC/EN 62040-4
Test and performance	IEC/EN 62040-3
Protection degree	IEC 60529
Marking	CE